









Ausführungen

B3


B5

B35

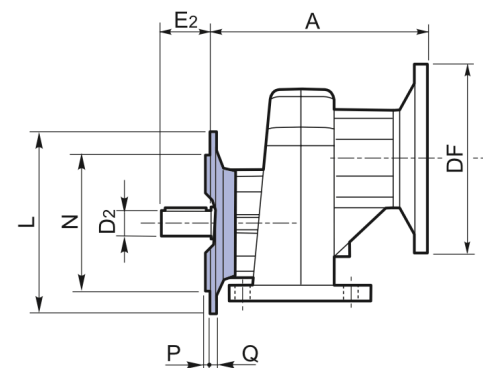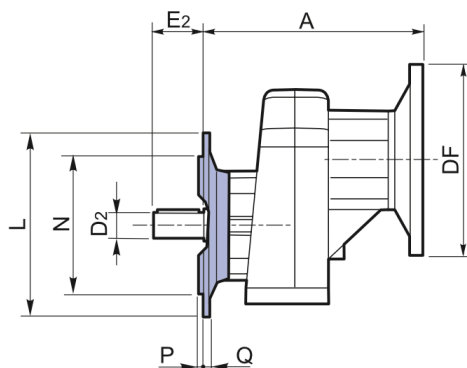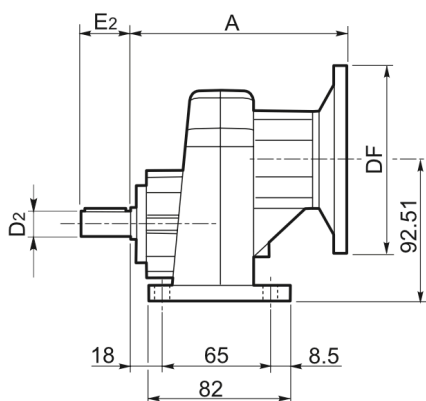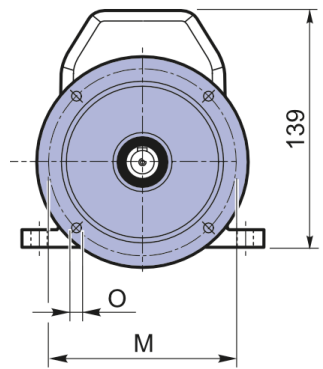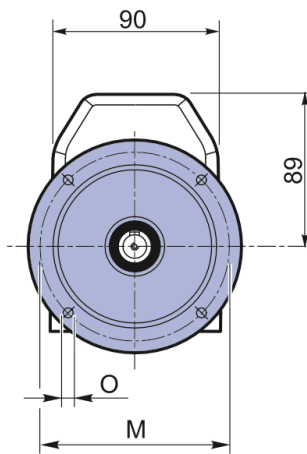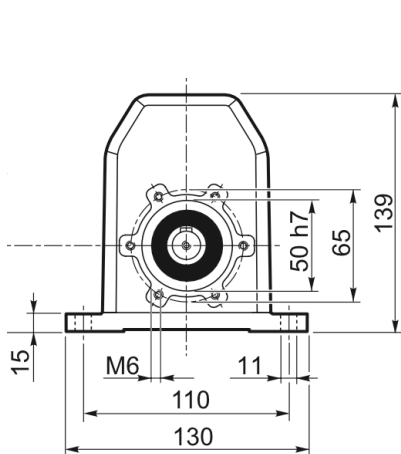

Abmessungen (mm)


Abtriebswelle

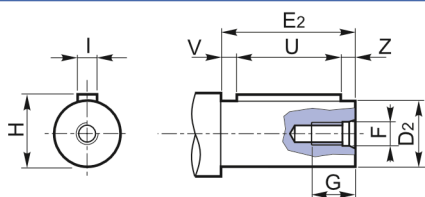

D ₂ h6	E ₂	F	G	H	I	U	V	Z
11	23	M4	10	12.5	4	16	3.5	3.5
14	30	M5	12	16	5	20	5	5
16	40	M6	16	18	5	30	5	5
19	40	M6	15	21.5	6	30	5	5
20	40	M8	19	22.5	6	30	5	5

	L	M	N h8	O	P	Q
NF120 - PF120	120	100	80	9 n°8	3	9
NF140 - PF140	140	115	95	9.5 n°8	3	9
NF160 - PF160	160	130	110	9.5 n°8	3.5	9

141	RCV			
	IEC	DF		A
		(B5)	(B14)	
	56	120	80	115.5
	63	140	90	
	71	160	105	
	80	200	120	125.5

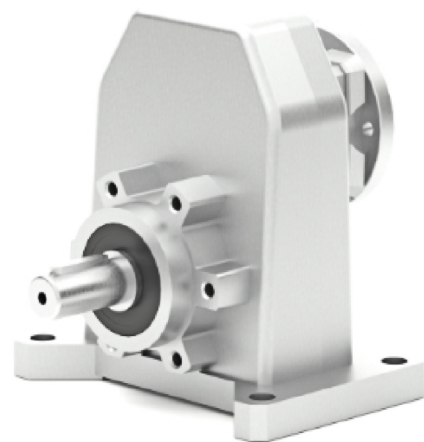

Abmessungen in mm

Ausführung nach DIN EN / IEC 60034-1; Technische Änderungen und Irrtümer vorbehalten

Blecher Motoren GmbH, Wilhelm-Röntgen-Straße 16-18, D-63477 Maintal

Tel.: 06181 / 428994-0, Fax 06181 / 428994-11, www.blecher.de