
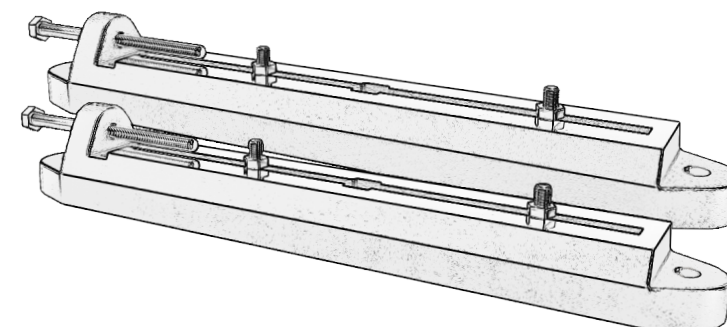


GG25

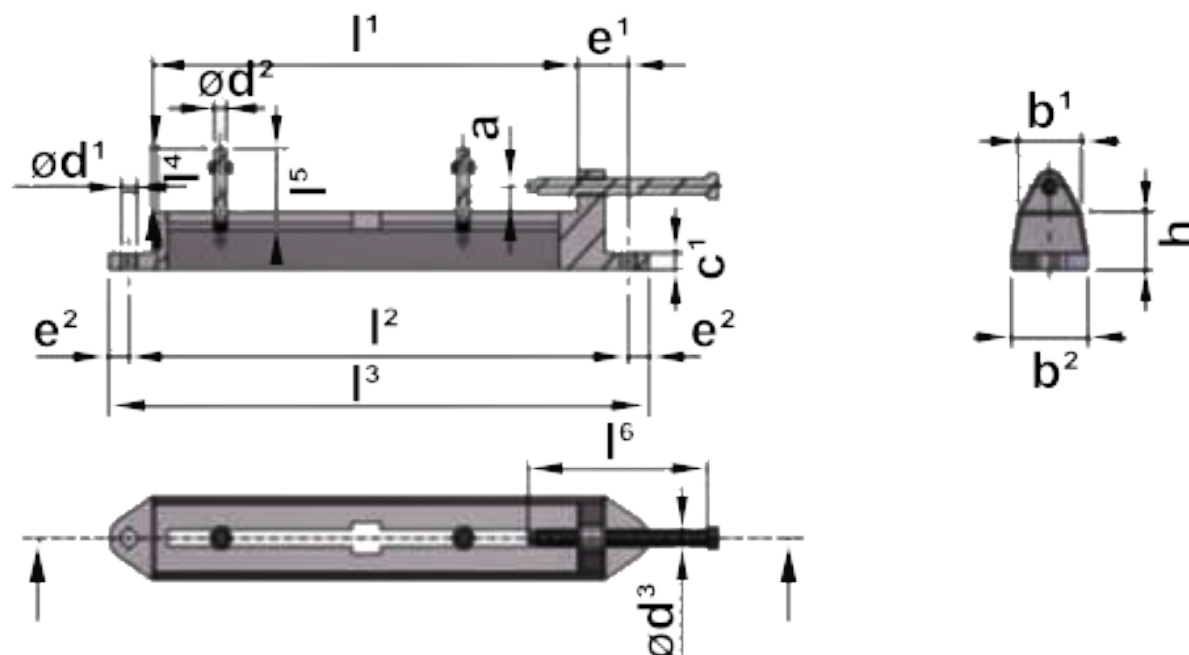

Type	Baugröße	Gleitlänge l^1	l^2	l^3	l^4	a	b^1	b^2	c^1 max	d^1	e^1	e^2	h	Befestigungs- schrauben $d^2 \times l^5$	Spannbolzen $d^3 \times l^6$	kg
GG25 80/90	80/90	315	390	430	28	8	45	55	18	12	55	20	35	M8x35	M12x160	5,0
GG25 100	100	355	430	470	37	8	50	65	23	12	55	20	40	M10x45	M12x160	8,0
GG25 112/132	112/132	400	480	530	37	8	55	70	25	15	65	25	45	M10x45	M12x160	10,5
GG25 160/180	160/180	500	610	670	50	12	70	85	30	19	80	30	55	M12x60	M20x240	19,5

Abmessungen in mm

Ausführung nach DIN EN / IEC 60034-1; Technische Änderungen und Irrtümer vorbehalten

Blecher Motoren GmbH, Wilhelm-Röntgen-Straße 16-18, D-63477 Maintal

Tel.: 06181 / 428994-0, Fax 06181 / 428994-11, www.blecher.de